

PUBLIC JOINT STOCK COMPANY

PJSC «POLTAVAMASH»



POLTAVA MACHINERY PLANT

PRESENTATION



[ABOUT ENTERPRISE](#)

[EQUIPMENT](#)

[CONTACTS](#)

[WEBSITE COMPANIES](#)

[EXIT](#)

PJSC «POLTAVAMASH»

Public Joint Stock Company "Poltava Engineering plant"

- One of the leading Ukrainian manufacturers
for the meat industry.

Traditional, for more than 60 years of operation of the enterprise,
is the production of manufacturing equipment and lines for the primary
processing of livestock, poultry and their products of slaughter. is commercially available

More than 250 pieces of equipment.

Our equipment is installed in many enterprises of Ukraine,
Russia and other CIS countries. The quality of products is the fact
that the existing system is working at the enterprises for over 60 years.

Easy to machine designs PJSC "Poltavamash", their reliability,
easy maintenance, relatively low price,
as well as a wide range of services,
give confidence in the successful collaboration with interested partners
on mutually beneficial terms.

BACK

С Уважением
Председатель правления
Григоренко А.М.

PJSC "Poltava Engineering plant"

Ukraine, 36007, Poltava st. Marshal Biryuzova, 27

Website <http://poltavamash.com.ua>

E-mail: plzavod@ukr.net, plmash@ukr.net

Contact numbers :

Chairman of the Board: Alexander
Grigorenko

Tel. / Fax: +38 (0532) 66-96-54

Deputy Chairman of technical issues: Gurin Georgy

Phone +38 (0532) 67-76-65

Design and marketing department:

Phone +38 (0532) 67-77-21

Sales Department:

Phone +38 (0532) 66-88-13, 66-87-37, 66-77-77, 66-94-24, 67-77-52? +38 (0532) 66-95-79, 66-86 -51

[BACK](#)

[SHOW ON MAP](#)



[MORE](#)



[MORE](#)



[MORE](#)



[MORE](#)

[LIST
EQUIPMENT](#)

[How to order](#)

[HOME](#)


Poultry processing equipment



МНОГОПРОФИЛЬНОЕ ПРЕДПРИЯТИЕ ПО ПРОИЗВОДСТВУ ОБОРУДОВАНИЯ ДЛЯ ПЕРЕРАБАТЫВАЮЩИХ ОТРАСЛЕЙ АГРОПРОМЫШЛЕННОГО КОМПЛЕКСА

LINE SEMI poultry evisceration brand K7 FTSL-100M

Intended for slaughter, bleeding, removal of plumage and semi gutting chickens, chickens, chickens, ducks.

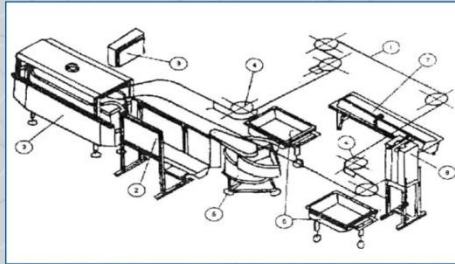

Line composition:

1. The conveyor K7-ФЦЛ-100M.10.00.000
2. Tray to drain of blood K7-ФЦЛ-100M.20.00.000
3. Bath tub thermal treatment K7-ФЦ-2Л-6/5-03
4. The ejector Я6-ФСБ
5. Centrifuge K7-ФЦЛ-100M.50
6. The trolley K7-ФЦЛ-2-Л/29
7. Table semi evisceration K7-ФЦЛ-100.70.00.000
8. The camera cleaning K7-ФЦЛ-100M.30.00.000
9. The control panel K7-ФЦЛ-100M.60.00.000

SPECIFICATIONS:

Performance of hens, chickens, broilers, ducklings	голов/ч	100
Power of electric motor	кВт	5,25
Water flow	м3/ч	1,0
Steam consumption	кг/ч	28
Required space	м2	36
Weight	кг	2732±50

Публичное акционерное общество "Полтавамаш" специализируется на выпуске оборудования различной производительности для мясокомбинатов, птицефабрик, сельхозпредприятий, фермерских хозяйств:

- комплексы убойных, колбасных, консервных цехов, а также цехов мясо-костной муки малой мощности;
- комплексы оборудования для переработки птицы;
- котлы-парообразователи

Заинтересованным организациям предоставляется необходимая информация и рекомендации специалистов, а по договоренности - монтажные и пусконаладочные работы.

Наш адрес: Украина, 36007, г. Полтава, ул. М. Бирюзова, 27
СБЛТ: +3(0532) 669424, 666813, 668737, 667777
ОГК: +3(0532) 677721

<http://www.poltavamash.com.ua>
E-mail: pizavod@ukr.net



BACK

HOME



МНОГОПРОФИЛЬНОЕ ПРЕДПРИЯТИЕ ПО ПРОИЗВОДСТВУ ОБОРУДОВАНИЯ ДЛЯ ПЕРЕРАБАТЫВАЮЩИХ ОТРАСЛЕЙ АГРОПРОМЫШЛЕННОГО КОМПЛЕКСА

ЦЕНТРИФУГА К7-ФЗЛ-100 М.50

Центрифуга предназначена для съема оперения с тушек бройлеров, кур, цыплят, уток, утят, гусей, гусят, индеек, индюшат и может быть использована для удаления воскомассы с пенькой при восковании водоплавающей птицы.

Центрифуга устанавливается как в системе конвейерной линии для обработки птицы, так и вне ее.



ТЕХНИЧЕСКАЯ ХАРАКТЕРИСТИКА

Производительность:

кур, цыплят, бройлеров (загрузка 8 гол.)	гол/ч	450-500
Время обработки	сек	45
уток, утят (загрузка 6 гол.)	гол/ч	150-180
Время обработки	сек	60
индеек, индюшат (загрузка 2-3 гол.)	гол/ч	100-120
Время обработки	сек	60
гусей, гусят (загрузка 3-4 гол.)	гол/ч	100-130
Скорость вращения	сек	70-80
Потребление энергии	кВт/ч	1,4
Мощность двигателя	кВт	0,7
Габаритные размеры		
- длина	мм	1200
- ширина (приоткрытой двери)	мм	1340
- высота	мм	1208
Внутренний диаметр емкости	мм	1000
Масса	кг	310

ПОЛТАВАМАШ

Наш адрес: Украина, 36007, г. Полтава, ул. М. Бирюзова, 27
Сбыт: +3(0532) 669424, 668813, 668737, 667777
ОГК: +3(0532) 677721

<http://www.poltavamash.com.ua>
E-mail: ptzavod@ukr.net

BACK

HOME



МНОГОПРОФИЛЬНОЕ ПРЕДПРИЯТИЕ ПО ПРОИЗВОДСТВУ ОБОРУДОВАНИЯ ДЛЯ ПЕРЕРАБАТЫВАЮЩИХ ОТРАСЛЕЙ АГРОПРОМЫШЛЕННОГО КОМПЛЕКСА

ELECTRIC MACHINERY OF Stun OF POULTRY BRAND R3-FEO

Apparatus Electrical of stunning of poultry R3-FEO is designed to stun the birds by the exposure to an electric current by using water as a coupling medium. Installed under the conveyor apparatus in primary line processing of land birds (chickens, broilers, turkeys) and waterfowl (ducks, geese). The machine is operated in closed heated facilities.



SPECIFICATIONS

Productivity, no more, units / hr.

- Chickens, broilers -6000
- Duck -2000
- Geese, turkeys -1000

Operating voltage, -60 ... 130

Supply voltage, V -220

Power Consumption, kWh -0,09

The adjustment range in height from the unit to the plane of the bearing surface, mm

- The minimum - no more than -800
- The maximum - not less than -1300

Overall dimensions, mm

- Length - 2400
- Width -990
- Height -2195

Weight, kg, not more than -166



Наш адрес: Украина, 36007, г. Полтава, ул. М. Бирюзова, 27
Сбыт: +3(0532) 669424, 668813, 668737, 667777
ОГК: +3(0532) 677721

<http://www.poltavamash.com.ua>
E-mail: plzavod@ukr.net

BACK

HOME



VERSATILE ENTERPRISE FOR PRODUCTION OF THE EQUIPMENT FOR PROCESSING INDUSTRIES OF AGRO-INDUSTRIAL COMPLEX

THE CAR FOR OFFICE OF THE HEADS OF BRAND К7-ФЦЛ 6/16-01...06

The car for office of the heads is intended for automatic office of the heads of broilers up to the second cervical vertebra with simultaneous removal of gullets and tracheas and is established in imboweling lines.

The car is issued in several modifications:

К7-ФЦЛ 6/16-01 to the line with a productivity of 6000 heads / h;
К7-ФЦЛ 6/16-02 to the line with a productivity of 3000 heads / h;
К7-ФЦЛ 6/16-03 to the line with a productivity of 2000 heads / h;
К7-ФЦЛ 6/16-04 to the line with a productivity of 1000 heads / h;
К7-ФЦЛ 6/16-05 to the line with a productivity of 1500 heads / h;
К7-ФЦЛ 6/16-06 to the line with a productivity of 500 heads / h.



TECHNICAL CHARACTERISTICS

Frequency of rotation of the screw, mines-1	
- К7-ФЦЛ 6/16-01	- 162
- К7-ФЦЛ 6/16-02	- 81
- К7-ФЦЛ 6/16-03	- 51
- К7-ФЦЛ 6/16-04	- 25.9
- К7-ФЦЛ 6/16-05	- 40.8
- К7-ФЦЛ 6/16-06	- 13
Rated capacity, kW	-0.55
Overall dimensions, mm, no more	
- length	- 1685
- width	- 695
- height	- 1188
Weight, kg, no more	

The product is issued in corrosion-proof or in the combined option.

Our address: Ukraine, 36007, Poltava, M. Biryuzov St., 27
Sales department: +3(0532) 669424, 668813, 668737, 667777
Sale manager: +38(066)684-31-82 Denis

<http://www.poltavamash.com.ua>
E-mail: plzavod@ukr.net

BACK

HOME



ПУБЛИЧНОЕ АКЦИОНЕРНОЕ ОБЩЕСТВО

ПОЛТАВАМАШ

МНОГОПРОФИЛЬНОЕ ПРЕДПРИЯТИЕ ПО ПРОИЗВОДСТВУ ОБОРУДОВАНИЯ ДЛЯ ПЕРЕРАБАТЫВАЮЩИХ ОТРАСЛЕЙ АГРОПРОМЫШЛЕННОГО КОМПЛЕКСА


LINES OF SLAUGHTER, IMBOWELING AND COOLING OF THE BIRD

Lines for slaughter, an imboweling, cooling and cutting of hens, chickens, broilers, ducklings. The line is operated on poultry farms, poultry farms and others to a bird the processing enterprises.

goal/hour is included in the package of processing of broilers with a productivity of 1500

Site of delivery of a bird under the conveyor

1. The B2-Ф11/2 conveyor - 1 piece
- Site of preprocessing
1. The K7-Ф11/6/41-17 conveyor - 1 piece
2. The device of electrodevoicalization of P3-ФЭО - 1 piece
3. The car of external slaughter of K7-Ф11/2-1-6/4-01 - 1 piece
4. Bathtub of thermal treatment of K7-Ф11/2-1-6/5-02 - 1 piece
5. The car of removal of plumage of K7-Ф11/1/7 - 3 pieces
6. The unit pump B2-Ф11/1/38 - 2 pieces
7. The car of office of the heads of K7-Ф11/1-6/16-03 - 1 piece
8. The car of office of feet of B2-Ф11/2-6/9 - 1 piece
9. Grinder of feet, K7-Ф11/1-6/39 heads - 1 piece
10. Tank пере.л.в internal P3-Ф11/1 - 1 piece
11. Tank пере.л.в internal K7-Ф11/2E - 1 piece
12. The device of sanitary processing of the K7-Ф0-2-1/6 conveyor - 1 piece
13. Separator for waste and B2-Ф11/2/37 feather - 1 piece
- Site of an imboweling
1. The mm L=4428 B2-Ф11/1-6/26-01 conveyor - 1 piece
2. The K7-Ф11/1 6/41-08 conveyor - 1 piece
3. The car of cutting and washing of stomachs K7-Ф00 1/3 - 1 piece
4. The car of removal of a cuticle of K7-Ф11/1/15 - 2 pieces
5. Tank пере.л.в internal P3-Ф11/1 - 1 piece
6. The car bilno-clearing K7-Ф11/1/6 - 1 piece
7. The pump for transfer of giblets B2-Ф11/1-6/67 - 3 pieces
8. The trench of hydrotransportation of that waste of B2-Ф11/2/1/3-01 - 1 piece

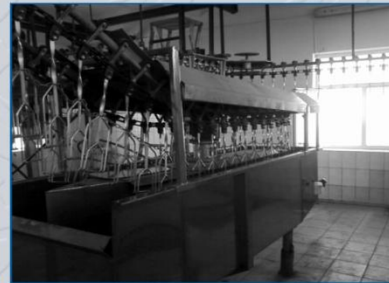

IV. Cooling site Installation of contact cooling of carcasses in ice water, including:

1. The camera of an irrigation R3-FO-2Ts-2/1 - 1 piece
2. Bathtub of cooling R3-FO-2Ts-2/2 - 1 piece
3. The K7-F1sL-6/41-15 conveyor - 1 piece
4. The mm L=5748 V2-F1sL-6/26-02 conveyor - 1 piece
5. The car bilno-clearing K7-F1sL/6 - 1 piece
- V. Site of processing of technical waste - 2 sets

The public joint-stock company "Poltavamash" specializes on release of the equipment of various productivity for meat-processing plants, poultry farms, agricultural enterprises, farms:

- complexes of lethal, sausage, canning shops, and also shops meat a bone flour of low power;
- complex of the equipment for processing of a bird;
- coppers steam generators necessary information and recommendations of experts, and about the arrangement - installation

Our address: Ukraine, 36007, Poltava, M. Biryuzov St., 27
Sales department: +3(0532) 669424, 668813, 668737, 667777
Sale manager: +38(066)684-31-82 Denis

<http://www.poltavamash.com.ua>
E-mail: plzavod@ukr.net



МНОГОПРОФИЛЬНОЕ ПРЕДПРИЯТИЕ ПО ПРОИЗВОДСТВУ ОБОРУДОВАНИЯ ДЛЯ ПЕРЕРАБАТЫВАЮЩИХ ОТРАСЛЕЙ АГРОПРОМЫШЛЕННОГО КОМПЛЕКСА

SEPARATOR BRAND B2 FTS2 L / 37

Separator B2 FTS2-A / 37 is designed to separate from the water and pen set in poultry processing lines in the areas of processing of the pen.



SPECIFICATIONS

Technical performance of the pen and waste from broiler units / h, not less	- 3000
Rotational speed of the drum, c-1 (rev / min)	- 0.55 (31...35)
The inner diameter of the drum, mm	- 560
Installed capacity, kW	- 0.55
Water flow in m ³ / h, not exceeding	- 1.5
Overall dimensions, mm, not more	
-length	- 2800
-width	- 1000
-height	- 1600

Наш адрес: Украина, 36007, г. Полтава, ул. М. Бирюзова, 27
Сбыт: +3(0532) 669424, 668813, 668737, 667777
ОГК: +3(0532) 677721

<http://www.poltavamash.com.ua>
E-mail: plzavod@ukr.net

BACK


HOME



МНОГОПРОФИЛЬНОЕ ПРЕДПРИЯТИЕ ПО ПРОИЗВОДСТВУ ОБОРУДОВАНИЯ ДЛЯ ПЕРЕРАБАТЫВАЮЩИХ ОТРАСЛЕЙ АГРОПРОМЫШЛЕННОГО КОМПЛЕКСА

The unit pump B2 FTS2-L38

The unit B2 FTS2-A / 38 is designed for the transport of water- feather pulp to separator.

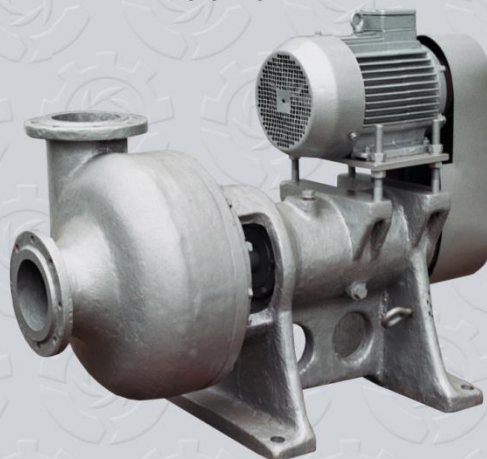

TECHNICAL SPECIFICATIONS

Performance (feed), m3 / h	-75
Pressure	-11
Installed capacity, kW	-11
The diameter of the discharge pipe, mm	-150
Suction Diameter, mm	-150
Overall dimensions, mm, not more	
- Length	-1205
- Width	-558
- Height	-980
Weight, kg, not more than	-580

Наш адрес: Украина, 36007, г. Полтава, ул. М. Бирюзова, 27
Сбыт: +3(0532) 669424, 668813, 668737, 667777
ОГК: +3(0532) 677721

<http://www.poltavamash.com.ua>
E-mail: plzavod@ukr.net

BACK

HOME



VERSATILE ENTERPRISE FOR PRODUCTION OF THE EQUIPMENT FOR PROCESSING INDUSTRIES OF AGRO-INDUSTRIAL COMPLEX

BRAND CARTS B2-ФЦ2-Л/29 and B2-ФЦ2-Л/29-01

Are intended for reception and transportation of carcasses of broilers, ducklings, the turkey poults unloaded from coolers, and also for transportation of carcasses of a bird in shop.

B2-ФЦ2-Л/29



The cart consists of the capacity (a welded design), a running gear and the handle.
Capacity is executed from stainless steel with the continuous bottom (B2-ФЦ2-Л/29) and capacity is executed with the openings evenly located on the bottom and intended for free running off of water from carcasses of a bird (B2-ФЦ2-Л/29-01).
The running gear consists of a tubular framework of a welded design and the rubberized wheels.

B2-ФЦ2-Л/29-01



TECHNICAL CHARACTERISTICS

Loading capacity, kg, no more - 140
Overall dimensions, mm, no more
-than length - the 1220th
-width - the 800th
-height - 910
Weight, kg, no more - 50

The product is issued in corrosion-proof or in the combined option.

Our address: Ukraine, 36007, Poltava, M. Biryuzov St., 27
Sales department: +38(0532) 669424, 668813, 668737, 667777
Sale manager: +38(066)684-31-82 Denis

<http://www.poltavamash.com.ua>
E-mail: plzavod@ukr.net

BACK

HOME



VERSATILE ENTERPRISE FOR PRODUCTION OF THE EQUIPMENT FOR PROCESSING INDUSTRIES OF AGRO-INDUSTRIAL COMPLEX

Unit of crushing and pickles of meat of brand Я2 -ФХ2Т.1

The unit of crushing and pickles of meat of the Я2-ФХ2Т.1 brand is intended for crushing of lump meat and its hashing with components for a pickles.
The grinder of the Я2-ФХ2Т.1 unit is modernized and structurally corresponds to K7-FVP-200 top.



SPECIFICATIONS:

Productivity technical, kg/h, not less	- 3500
Geometrical capacity of a loading bowl of m ³ , no more	- 0,25
Geometrical capacity of the mixing capacity of m ³ , no more	- 0,72
Diameter of lattices of the cutting mechanism of a grinder, mm	- 200
Height from a floor to the bottom edge of a mouth of the unloading device, mm	- 800
Frequency of rotation of the working screw of a grinder, with-1	- 5,45
Frequency of rotation of mixing shaft of a mixer for forcemeat, with-1	- 0,35
Frequency of rotation of the unloading screw of a mixer for forcemeat, with-1	- 1,68
Consumed electric power for 1 hour of work, kW. h, no more	- 29
Overall dimensions, mm, no more than	
-length	- 3880
-width	- 2100
-height	- 2020
Weight, kg, no more	- 2690

Our address: Ukraine, 36007, Poltava, M. Biryuzov St., 27
Sales department: +3(0532) 669424, 668813, 668737, 667777
Sale manager: +38(066)684-31-82 Denis

<http://www.poltavamash.com.ua>
E-mail: plzavod@ukr.net

BACK

HOME



VERSATILE ENTERPRISE FOR PRODUCTION OF THE EQUIPMENT FOR PROCESSING INDUSTRIES OF AGRO-INDUSTRIAL COMPLEX

BRAND TOP K7-ФВП-130

Technical characteristics



1. Productivity, kg/h	2500
2. Nominal diameter of a lattice, mm	130
3. Capacity of a loading bowl, m, not less	0.15
4. Height, mm, no more	
- raw materials loadings	1390
- unloadings of the crushed product	770
5. Frequency of rotation of screws, rpm	
- worker	157; 326
- the giving	13; 26
6. Rated capacity, kW, no more	
- drive of the working screw	6,7/11
- the drive of giving screws	1,4/2,4
7. Overall dimensions, mm, no more	
- length	1200
- width	1050
- height	1490
8. Weight, kg, no more	650

Волчок работает с жилочным устройством

Principle of work of a wolf

Appointed boneless meat in pieces weighing no more than 1.5 kilograms are served in a loading bowl, from where by the conical screw it is passed to the working screw and further is transported in a zone of the cutting mechanism. In the cutting mechanism the raw materials are crushed to set extent of crushing which is provided by installation of a necessary set of knives and lattices.

The top differs simplicity of a design, is reliable in work and is convenient in maintenance.

Mechanisms of the Top are well available to sanitary processing thanks to simplicity of dismantling of working bodies.

The public joint-stock company "Poltavamash" specializes on release of the equipment of various productivity for meat-processing plants, poultry farms, the agricultural enterprises, farms:

- a complex of lethal, sausage, canning shops, and also shops meat - a bone flour of low power;
- a complex of the equipment for processing of a bird;
- coppers steam generators

Necessary information and recommendations of experts, and about the arrangement - installation and commissioning is provided to the interested organizations.

Our address: Ukraine, 36007, Poltava, M. Biryuzov St., 27
Sales department: +3(0532) 669424, 668813, 668737, 667777
Sale manager: +38(066)684-31-82 Denis

<http://www.poltavamash.com.ua>
E-mail: plzavod@ukr.net

BACK

HOME



VERSATILE ENTERPRISE FOR PRODUCTION OF THE EQUIPMENT FOR PROCESSING INDUSTRIES OF AGRO-INDUSTRIAL COMPLEX

TOP-MIXER K7-ФВМ-114

It is intended for preliminary mixing of lumpy meat and meat products with further crushing for forcemeat preparation. Provides uniformity of hashing of weight, comparable with received by means of a mixer of industrial production with a top. High degree of reliability, convenience of service and sanitary processing.



TECHNICAL CHARACTERISTICS:

Productivity,	kg/h	1500
Diameter of knife lattices,	mm	114
Capacity of the loading bunker,	l	115
Capacity of the main engine,	kW	7,5
Engine capacity of a mixer,	kW	1,5
Overall dimensions,	mm:	
length		1095th
width		755th
height		1380th
mass of kg		415

The public joint-stock company "Poltavamash" specializes on release of the equipment of various productivity for meat-processing plants, poultry farms, the agricultural enterprises, farms:

- complexes of lethal, sausage, canning shops, and also shops meat - a bone flour of low power;
- a complex of the equipment for processing of a bird;
- coppers steam generators

Necessary information and recommendations of experts, and about the arrangement - installation and commissioning is provided to the interested organizations.

Our address: Ukraine, 36007, Poltava, M. Biryuzov St., 27
Sales department: +3(0532) 669424, 668813, 668737, 667777
Sale manager: +38(066)684-31-82 Denis

<http://www.poltavamash.com.ua>
E-mail: plzavod@ukr.net

BACK

HOME



ПУБЛИЧНОЕ АКЦИОНЕРНОЕ ОБЩЕСТВО

МНОГОПРОФИЛЬНОЕ ПРЕДПРИЯТИЕ ПО ПРОИЗВОДСТВУ ОБОРУДОВАНИЯ ДЛЯ ПЕРЕРАБАТЫВАЮЩИХ ОТРАСЛЕЙ АГРОПРОМЫШЛЕННОГО КОМПЛЕКСА

ВОЛЧОК К7-ФВП-130

Характеристика



1. Производительность, кг/ч	2500
2. Номинальный диаметр решетки, мм	130
3. Вместимость загрузочной чаши, м ³ , не менее	0,15
4. Высота, мм, не более	
- загрузки сырья	1390
- выгрузки измельченного продукта	770
5. Частота вращения шнеков, об/мин	
- рабочего	157; 326
- подающих	13; 26
6. Установленная мощность, кВт, не более	
- привода рабочего шнека	6,7/11
- привода подающих шнеков	1,4/2,4
7. Габаритные размеры, мм, не более	
- длина	1200
- ширина	1050
- высота	1490
8. Масса, кг, не более	650

Волчок работает с жилочным устройством

Принцип работы волчка

Жилочное бескостное мясо в кусках массой не более 1.5 кг подается в загрузочную чашу, откуда конусным шнеком оно передается рабочему шнеку и далее транспортируется в зону режущего механизма. В режущем механизме сырье измельчается до заданной степени измельчения, которая обеспечивается путем установки необходимого набора ножей и решеток. Волчок отличается простотой конструктивного исполнения, надежен в работе и удобен в техническом обслуживании. Механизмы волчка хорошо доступны для санитарной обработки благодаря простоте разборки рабочих органов.

Публичное акционерное общество "Полтавамаш" специализируется на выпуске оборудования различной производительности для мясокомбинатов, птицефабрик, сельхозпредприятий, фермерских хозяйств:

- комплексы убойных, колбасных, консервных цехов, а также цехов мясо-костной муки малой мощности;
- комплекс оборудования для переработки птицы;
- котлы-парообразователи

Заинтересованным организациям предоставляется необходимая информация и рекомендации специалистов, а по договоренности - монтажные и пусконаладочные работы.

Наш адрес: Украина, 36007, г. Полтава, ул. М. Бирюзова, 27
Сбыт: +3(0532) 669424, 668813, 668737, 667777
ОГК: +3(0532) 677721

<http://www.poltavamash.com.ua>
E-mail: plzavod@ukr.net

BACK

HOME

ОГК: +3(0532) 677721
СРМА: +3(0532) 669424, 668813, 668737, 667777
Наш адрес: Украина, 36007, г. Полтава, ул. М. Бирюзова, 27

E-mail: plzavod@ukr.net
<http://www.poltavamash.com.ua>



VERSATILE ENTERPRISE FOR PRODUCTION OF THE EQUIPMENT FOR PROCESSING INDUSTRIES OF AGRO-INDUSTRIAL COMPLEX

BRAND TOP К7-ФВП-160-01

It is intended for crushing of boneless appointed meat and meat products by production of forcemeats for the sausage and other meat products cooled under natural conditions to ambient temperature from plus of 10 to plus of 12 °C or special influence of low temperatures at certain modes from plus of 2 to plus of 3 °C in the thickness.

TECHNICAL CHARACTERISTICS

Productivity, kg/h, not less	- 3000
Capacity of a loading bowl, m ³ , no more	- 0,07
Nominal diameter of a lattice, mm	- 160
Height, mm	- 1250
- raw materials loadings	- 850
- unloading of the crushed product	- 120
Frequency of rotation of screws, mines-1	- 250
- reception	- 15
- the worker	- 1400
Rated capacity of the electric motor, kW, no more	- 610
Overall dimensions, mm, no more	- 1300
- length	- 600
- width	- 1300
- height	- 600
Weight, kg, no more	- 600



The principle of work of a top of meat in pieces weighing up to 1,0 kg moves in a loading bowl 1, from where spontaneously arrives in the case of screws where it is taken reception and working screws and is transported in a zone of the cutting mechanism. In the cutting mechanism the raw materials are crushed to set extent of crushing which is provided by installation of a necessary set of knives and lattices

The product is issued in corrosion-proof or in the combined option.

Our address: Ukraine, 36007, Poltava, M. Biryuzov St., 27
+3(0532) 669424, 668813, 668737, 667777
Sale manager: +38(066)684-31-82 Denis

<http://www.poltavamash.com.ua>
E-mail: plzavod@ukr.net

BACK

HOME



ПУБЛИЧНОЕ АКЦИОНЕРНОЕ ОБЩЕСТВО

ПОЛТАВАМАШ

МНОГОПРОФИЛЬНОЕ ПРЕДПРИЯТИЕ ПО ПРОИЗВОДСТВУ ОБОРУДОВАНИЯ ДЛЯ ПЕРЕРАБАТЫВАЮЩИХ ОТРАСЛЕЙ АГРОПРОМЫШЛЕННОГО КОМПЛЕКСА

BRAND TOP К7-ФВП-200

The top is intended for crushing of boneless appointed meat and meat products by production of forcemeats for the sausage and other meat products cooled under natural conditions to ambient temperature from 4 to 12 °C or special influence of low temperatures at certain modes to 2-3 °C in the thickness.

TECHNICAL CHARACTERISTICS

Productivity, kg/h	- 6500
Nominal diameter of a lattice, mm	- 200
Capacity of a loading bowl, m3	- 0,25
Height, mm	
- raw materials loadings	- 1600
- unloadings of the crushed product	- 900
Rated capacity, kW, - the drive of reception screws	- 2.2
- the drive of the working screw	- 30
Overall dimensions, mm, no more	
- length	- 1375
- width	- 1270
- height	- 1600
Weight, kg, no more	- 1100



The public joint-stock company "Poltavamash" specializes on release of the equipment of various productivity for meat-processing plants, poultry farms, agricultural enterprises, farms:

- complexes of lethal, sausage, canning shops, and also shops meat - a bone flour of low power;
- complex of the equipment for processing of a bird;
- coppers steam generators necessary information and recommendations of experts, and about the arrangement - installation and commissioning is provided to the Interested

The product is issued in corrosion-proof or in the combined option.

BACK

HOME



VERSATILE ENTERPRISE FOR PRODUCTION OF THE EQUIPMENT FOR PROCESSING INDUSTRIES OF AGRO-INDUSTRIAL COMPLEX

BRAND TOP К7-ФВП-120

It is intended for continuous crushing of boneless meat and meat products by production of forcemeats for sausage and other meat products. Temperature of loaded raw materials has to be 1 don't string 1 degree.



TECHNICAL CHARACTERISTICS

<i>Productivity, kg/h, not less</i>	<i>- 2000</i>
<i>Diameter of knife lattices, mm</i>	<i>- 120</i>
<i>Capacity of a loading bowl, l</i>	<i>- 250</i>
<i>Height of unloading of the crushed product, mm</i>	<i>- 800</i>
<i>Rated capacity, kW</i>	<i>- 12,5</i>
<i>Overall dimensions, mm, no more</i>	
<i>- length</i>	<i>- 1600</i>
<i>- width</i>	<i>- 900</i>
<i>- height</i>	<i>- 1600</i>
<i>Weight, kg, no more</i>	<i>- 800</i>

Our address: Ukraine, 36007, Poltava, M. Biryuzov St., 27
Sales department: +3(0532) 669424, 668813, 668737, 667777
Sale manager: +38(066)684-31-82 Denis

<http://www.poltavamash.com.ua>
E-mail: plzavod@ukr.net

BACK

HOME



VERSATILE ENTERPRISE FOR PRODUCTION OF THE EQUIPMENT FOR PROCESSING INDUSTRIES OF AGRO-INDUSTRIAL COMPLEX

SEPARATING HEAD

K7-ФГС-200

The head separating K7-FGS-200 is intended for a mechanical boning of fowl: deliveries of boneless "forcemeat" and separate delivery of bone weight.

The head has to be fixed on the output cylinder of a top of K7-FVP-200, production of "The Poltava engineering plant"



The MAIN SPECIFICATIONS

- | | |
|---|----------------|
| 1 Productivity technical (on forcemeat delivery with a temperature not above +8°C) at 230 rpm of the working screw of kg/h | -500-700 |
| 2 Type of processed raw materials –; parts of a bird from the remains of meat of hens, broilers and ducks (frameworks, necks, wings, etc.) at a temperature | - 1°C ... +2°C |
| 3 Admissible amount of roundish bone inclusions have to be, mm, no more than | -0,5 |
| 4 Rated capacity, height of loading and product unloading – according to a technical characteristics of a top of K7-FVP-200. | |
| 5 Overall dimensions, mm: | |
| length | - 775 |
| width | - 326 |
| height | - 378 |
| 6 Weight, kg | - 90 Note: |
- Head application for a boning of the whole carcasses of a bird is possible.
Thus at additional expense the head is completed with a sleeve with increased sizes of slot-hole flutes.

BACK

Our address: Ukraine, 36007, Poltava, M. Biryuzov St., 27
Sales department: +3(0532) 669424, 668813, 668737, 667777
Sale manager: +38(066)684-31-82 Denis

<http://www.poltavamash.com.ua>
E-mail: plzavod@ukr.net

HOME



VERSATILE ENTERPRISE FOR PRODUCTION OF THE EQUIPMENT FOR PROCESSING INDUSTRIES OF AGRO-INDUSTRIAL COMPLEX

GRINDER OF THE FROZEN GROCERY BLOCKS К7-ФБМ

Grinders are intended for crushing of the frozen grocery blocks (meat, cottage cheese, chocolate, butter etc.) on slices in lines on production of baby food, meat semi-finished products, sausages and sausages (without a defrostirovaniye) with a temperature from -18 With to - 3 C.



TECHNICAL CHARACTERISTICS

Technical productivity, kg/h, not les	- 8000
Rated capacity, kW, no more	-15
The mass of pieces of the crushed product, no more	-300*
Minimum temperature of the grocery block , C	- 18 °
Height to a loading window, mm	-1285-1305
Height of unloading of the crushed product in the cart, mm	-720-755
The sizes of loaded blocks, mm, no more	- 600x400x200
Overall dimensions, mm, no more	
length	-1125
width	-1080
height	-1670-1700
Занимаемая	
Weight, kg, no more	-705

* existence to 10 pieces of bigger weight from one crushed block is allowed



VERSATILE ENTERPRISE FOR PRODUCTION OF THE EQUIPMENT FOR PROCESSING INDUSTRIES OF AGRO-INDUSTRIAL COMPLEX


GRINDER OF THE FROZEN GROCERY BLOCKS

К7-ФБМ

Grinders are intended for crushing of the frozen grocery blocks (meat, cottage cheese, chocolate, butter etc.) on slices in lines on production of baby food, meat semi-finished products, sausages and sausages (without a defrostirovaniye) with a temperature from -18 With to - 3 C.

TECHNICAL CHARACTERISTICS

Height of unloading of the crushed product in the cart, mm	-720-755
Technical productivity, kg/h, not less	- 8000
The sizes of loaded blocks, mm, no more	- 600x400x200
Rated capacity, kW, no more	-15
The mass of pieces of the crushed product, no more	-300*
Minimum temperature of the grocery block, °C	- 18
Height to a loading window, mm	-1285 -1305
Overall dimensions, mm, no more	
length	-1125
width	-1080
height	-1670-1700
Занимаемая	
Weight, kg, no more	-705

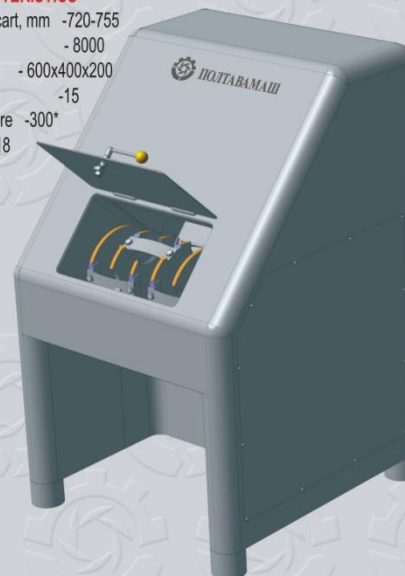

* existence to 10 pieces of bigger weight from one crushed block is allowed

Our address: Ukraine, 36007, Poltava, M. Biryuzov St., 27
Sales department: +3(0532) 669424, 668813, 668737, 667777
Sale manager: +38(066)684-31-82 Denis

<http://www.poltavamash.com.ua>
E-mail: plzavod@ukr.net

BACK

HOME



VERSATILE ENTERPRISE FOR PRODUCTION OF THE EQUIPMENT FOR PROCESSING INDUSTRIES OF AGRO-INDUSTRIAL COMPLEX

SYRINGE VACUUM K7-FSHV-3

The syringe vacuum the K7-FShV-3 brands is intended for pumping out of mincemeat and filling of sausage covers by it by production of boiled and half-smoked sausages.
In addition the syringe of K7-FShV-3 can be completed with a filler of cans of the K7-FShV-3M.00.500M brand.
The syringe is established on meat-processing plants in shops on production of sausages, and also in shops of the meat-processing enterprises of low power.



TECHNICAL CHARACTERISTICS

- | | |
|---|-------|
| 1. Productivity, not less | |
| - half-smoked sausages, kg/h | -400 |
| - boiled sausages, kg/h | -700 |
| - when filling cans by paste, tubas/change | -2 |
| 2. Bunker capacity, not less than | -0.07 |
| 3. Rated capacity, kW, no more than | -4.75 |
| 4. Maximum depression of system vacuum, Mpa | -0.07 |
| 5. Coefficient of automation | -0.6 |
| 6. Overall dimensions, no more, than a mm | |
| - length | -1160 |
| - width | -680 |
| - height | -1630 |
| 7. Weight, kg | -260 |
| 8. Number of the service personnel, people | -1 |



MIXER FOR BRAND FORCEMEAT K7-ФМУ-150

It is intended for mixing of components of the forcemeat provided by a compounding and technological process of production of sausage products and is established in shops of the meat-processing enterprises.

The mixer for forcemeat consists of the following parts: beds, the drive of mixing screws, the mechanism of loading, a trough of the mixing drive, the hatch of unloading of forcemeat, the panel with buttons of management, a cover.

Knots and details contacting to foodstuff, are made of corrosion-resistant steel.

At the request of the customer the mixer for forcemeat can be delivered with the independent mechanism of loading.



Geometrical capacity of a trough for mixing, not less than a m³	- 0.15
Productivity technical, kg/h, not less	- 1600
Rated capacity of engines, kW, no more including:	
- the drive of mixing screws	- 3
Overall dimensions of a mixer for forcemeat, mm, no more	
- length	- 2700
- width	- 965
- height	- 1375
Weight without the mechanism of loading, kg, no more	- 455

BACK

Our address: Ukraine, 36007, Poltava, M. Biryuzov St., 27
Sales department: +3(0532) 669424, 668813, 668737, 667777
Sale manager: +38(066)684-31-82 Denis

<http://www.poltavamash.com.ua>
E-mail: pizavod@ukr.net

HOME



VERSATILE ENTERPRISE FOR PRODUCTION OF THE EQUIPMENT FOR PROCESSING INDUSTRIES OF AGRO-INDUSTRIAL COMPLEX

Mill for crushing of spices of brand K7-ФМС

The mill for crushing of spices of the K7-FMS brand is intended for processing of spices (pepper black, fragrant, red, cardamom, a coriander) used for meat-packing, sausage and other productions.



TECHNICAL CHARACTERISTICS

Productivity, kg/h	- 50-70
Capacity of the bunker, m	- 0.07 ³
Rated capacity, kW	- 2.2
Supply voltage,	- 380 V
Frequency of rotation of a rotor, rpm	- 600
Overall dimensions, no more than	
-length of mm	- 780th
-width of mm	- 405th
-height of mm	- 650
Weight, kg	- 115
Number of the service personnel,	- 1 man



BACK

Our address: Ukraine, 36007, Poltava, M. Biryuzov St., 27
Sales department: +3(0532) 669424, 668813, 668737, 667777
Sale manager: +38(066)684-31-82 Denis

<http://www.poltavamash.com.ua>
E-mail: plzavod@ukr.net

HOME



МНОГОПРОФИЛЬНОЕ ПРЕДПРИЯТИЕ ПО ПРОИЗВОДСТВУ ОБОРУДОВАНИЯ ДЛЯ ПЕРЕРАБАТЫВАЮЩИХ ОТРАСЛЕЙ АГРОПРОМЫШЛЕННОГО КОМПЛЕКСА

Crusher for, BONE K7 FML / 1

Suitable for crushing bones, in the processing of carcasses of cattle, pigs.
Crusher is set at meat low-power equipment
for the production of edible bone fat, dry animal feed and technical fat. Suitable for crushing bone formed during the processing of the carcasses of cattle and pigs.
Crusher is set at meat low-power equipment
for the production of edible bone fat, dry animal feed and technical fat.



TECHNICAL SPECIFICATIONS

Productivity, kg / h	- 1500
Maximum upload size pieces of raw material, mm, not more	- 180x90
Size pieces of raw material, after grinding, mm, not more	- 40x40x40 - 80%
	- 70x70x40-10%
	- 100x70x40-10%
Installed capacity, kW, not more	- 11
Overall time measures mm, not more than	- Length - 1210
	- Width - 1380
	- Height - 1800
Weight, kg, not more than	- 800

Наш адрес: Украина, 36007, г. Полтава, ул. М. Бирюзова, 27
Сбыт: +3(0532) 669424, 668813, 668737, 667777
ОГК: +3(0532) 677721

<http://www.poltavamash.com.ua>
E-mail: plzavod@ukr.net

BACK

HOME



ПУБЛИЧНОЕ АКЦИОНЕРНОЕ ОБЩЕСТВО
ПОЛТАВАМАШ

МНОГОПРОФИЛЬНОЕ ПРЕДПРИЯТИЕ ПО ПРОИЗВОДСТВУ ОБОРУДОВАНИЯ ДЛЯ ПЕРЕРАБАТЫВАЮЩИХ ОТРАСЛЕЙ АГРОПРОМЫШЛЕННОГО КОМПЛЕКСА

TANK FAT BRAND K7 FML / 4

PURPOSE:

Sump oil brand K7 FML / 4, is part of the line for the production of meat and bone meal and is designed to uphold fat. Sumps are installed meat processing plants, departments low power.



SPECIFICATIONS

Geometric size m3, more	- 0.34
The steam consumption at a pressure of 0.7 kg / cm ² kg / hr	- 4.2
Temperature fat, ° C	- + 65
Inner Diameter, mm	- 600
Overall dimensions, mm, not more	
- Width	- 900
- Height	- 1240
Weight, kg, not more than	- 120

The product is available in stainless steel or combined version.

Публичное акционерное общество "Полтавамаш" специализируется на выпуске оборудования различной производительности для мясокombинатов, птицефабрик, сельхозпредприятий, фермерских хозяйств:

- комплексы убойных, колбасных, консервных цехов, а также цехов мясо-костной муки малой мощности;
- комплекс оборудования для переработки птицы;
- котлы-парообразователи

Заинтересованным организациям предоставляется необходимая информация и рекомендации специалистов, а по договоренности - монтажные и пусконаладочные работы.

Наш адрес: Украина, 36007, г. Полтава, ул. М. Бирюзова, 27
Сбыт: +3(0532) 669424, 668813, 668737, 667777
ОГК: +3(0532) 677721

<http://www.poltavamash.com.ua>
E-mail: plzavod@ukr.net

BACK


HOME



VERSATILE ENTERPRISE FOR PRODUCTION OF THE EQUIPMENT FOR PROCESSING INDUSTRIES OF AGRO-INDUSTRIAL COMPLEX

THE CAR UNIVERSAL FOR PROCESSING OF GUTS OF BRAND К7-Ф0К

**The car is intended for final cleaning of small intestines:
beef and preliminary and final cleaning pork and mutton,
previously passed processing – release from contents on squeezing rollers.**

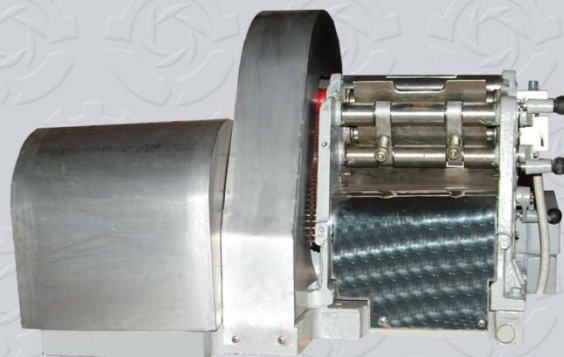

TECHNICAL CHARACTERISTICS

Productivity when processing guts not less

- beef	- 30
- pork	- 80
- mutton	- 60
Temperature of irrigating water, °C	- 40-45
Consumption of water, at obligatory ensuring pressure in system, m3	
- not less	- 0.2
- no more	- 0.2
Rated capacity, kW	- 1.5
Overall dimensions, mm, no more	
- length	- 1050
- width	- 586
- height	- 1360
Weight, kg, no more	- 240

Our address: Ukraine, 36007, Poltava, M. Biryuzov St., 27
Sales department: +3(0532) 669424, 668813, 668737, 667777
Sale manager: +38(066)684-31-82 Denis

<http://www.poltavamash.com.ua>
E-mail: plzavod@ukr.net

BACK

HOME

SPARE PARTS for steam turbines



УЗЛЫ И ДЕТАЛИ ПРОТОЧНОЙ ЧАСТИ



ПОЛТАВАМАШ

BACK

HOME

SPARE PARTS for steam turbines


ПОЛТАВАМАШ



УЗЛЫ И ДЕТАЛИ РЕГУЛИРОВАНИЯ И ПАРОРАСПРЕДЕЛЕНИЯ

ПОЛТАВАМАШ

BACK

HOME


ПОЛТАВАМАШ



МУФТЫ ЗУБЧАТЫЕ

SPARE PARTS for steam turbines


ПОЛТАВАМАШ



ДЕТАЛИ
ПИТАТЕЛЬНЫХ НАСОСОВ

BACK

ПОЛТАВАМАШ

HOME

SPARE PARTS for steam turbines


ПОЛТАВАМАШ



**КРЕПЕЖ ВИСОКОГО
ДАВЛЕННЯ**


BACK

ПОЛТАВАМАШ

HOME

SPARE PARTS for steam turbines


ПОЛТАВАМАШ

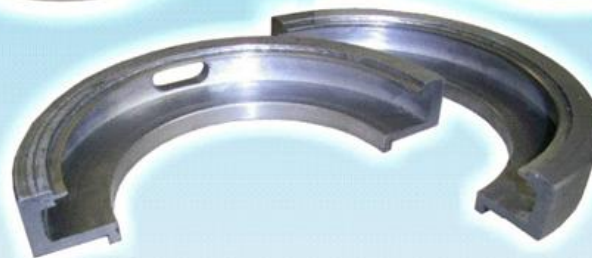

ВСПОМАГАТЕЛЬНОЕ ОБОРУДОВАНИЕ ЭЛЕКТРОСТАНЦИЙ


BACK

ПОЛТАВАМАШ

HOME

SPARE PARTS for steam turbines


ПОЛТАВАМАШ

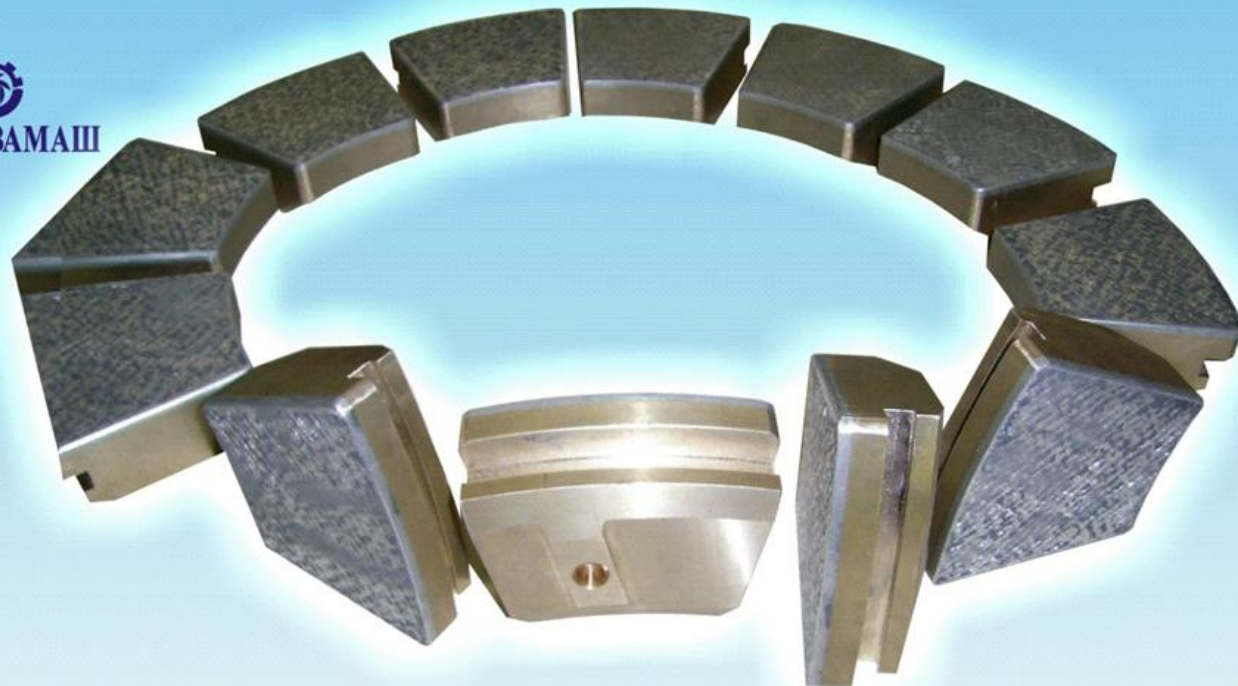

ДЕТАЛИ ТУРБИННЫХ
ПОДШИПНИКОВ СКОЛЬЖЕНИЯ

BACK

ПОЛТАВАМАШ

HOME